

FEATURES:

- Heavy Gauge Steel Housing.
- Finish is high reflectance baked white enamel.
- Wiring knockouts are provided on back and end of housing.
- Opal PC lens, high flame retardant point.
- Class II/P driver, with 0-10V or Triac dimming.
- 50,000+ Hours LED Life Expectancy.
- Fast and easy to install.
- Power factor: >0.98.
- Quick disconnects between housing .
- Driver disconnect provided where required to comply.
- 5 Year Warranty.
- UL/cUL us listed.
- Ambient Temperature: -20 ~ 40 °C
- Damp Location Rated

APPLICATIONS:

Storage rooms/Offices
 Conference rooms/Retail
 Reception areas/Hallways
 Education facilities
 Parking Garages



Ordering information

Item	Watts	CCT	Efficacy	Lumens	Dimension(L*W*H):Inch		
RSL 4640	40W	35K 40K 50K	125-140 lm/w	5,000- 5,600lm	48.07	4.33	2.41


ORDERING

Model	Color of Lens	Watts	Length	Mounting Method	CCT	Driver	Accessories
RSL 4640	LM - milky lens/perforati on cover	040: 40W	14-4FT	B: Surface/ Suspended	30:3000K 35:3500K 40:4000K 45:4500K 50:5000K VK-CCT tunable	D1-120-277V D2-347V D3-120-347V D4-120-277V wattage selectable D5-120-347V wattage selectable D6-347-480V	A: No sensor&EM B: With Sensor C: With EM D: With Sensor&EM


CCT Tunable



- 3000K/3500K-Warm White
- 4000K-Nature White
- 5000K-Cold White

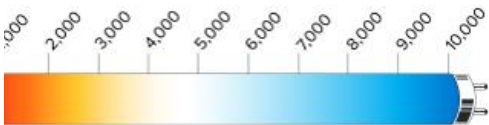

PHOTOMETRIC

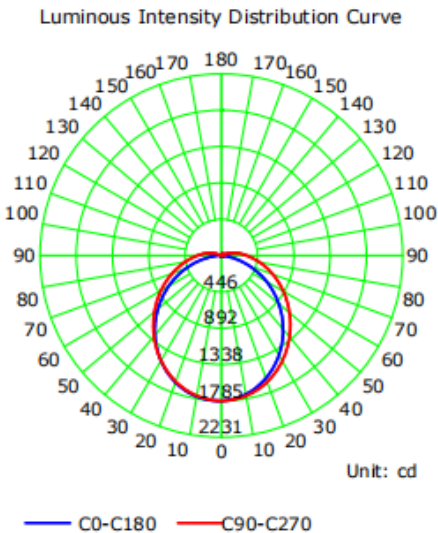


Luminaire	4000K
Input Voltage(VAC)	120-277
Power (W)	40.03
Delivered Lumen(Lm)	5513.8
Efficacy(Lm/W)	135
Beam Angle	H100.2 V111.1
Power Factor(PF)	>92
Color Rendering Index(CRI)	>82



INSTALLATION

■ Installation

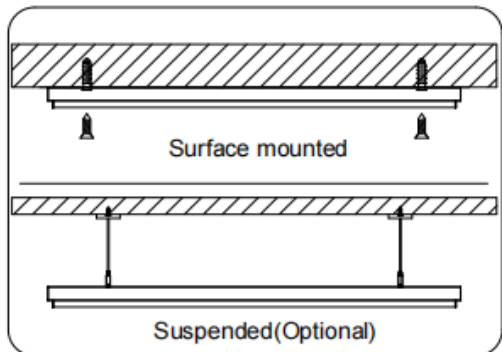

■ Assembly/Disassembly

A.


Pulling the springs to middle from two sides



Pre-set CCT&Wattage
Before Completing Installation

B. Setting Cover lens part to Lights body and make them connect well

C. Fixing the screws on two end cover with Philips Screwdriver



D. Insert the plastic caps to cover the screw

Assembly: A--B--C--D
Disassembly: D--C--B--A