


FEATURES:

- Heavy Gauge Steel Housing.
- Finish is high reflectance baked white enamel.
- Wiring knockouts are provided on back and end of housing.
- Opal PC lens, high flame retardant point.
- Class II/P driver, with 0-10V or Triac dimming.
- 50,000+ Hours LED Life Expectancy.
- Fast and easy to install.
- Power factor: >0.98.
- Quick disconnects between housing .
- Driver disconnect provided where required to comply.
- 5 Year Warranty.
- UL/cUL us listed.
- Ambient Temperature:-30 ~ 40 °C(-22° F to +104° F)
- Damp Location Rated



APPLICATIONS:

Storage rooms/Offices
 Conference rooms/Retail
 Reception areas/Hallways
 Education facilities
 Parking Garages

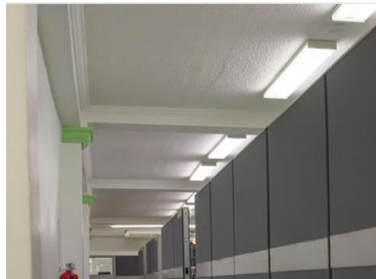

Ordering information

Item	Watts	3 CCT	Efficacy	Lumens	Dimension(L*W*H):Inch		
RWR 4525	25W	35K 40K 50K	110lm/w	2,750lm	24.30	4.8	4.33
RWR 4540	40W	35K 40K 50K	110lm/w	4,400lm	48.30	4.8	4.33
RWR 4580	80W	35K 40K 50K	110lm/w	8,800lm	96.06	4.8	4.33


ORDERING

Model	Color of Lens	Watts	Length	Mounting Method	CCT	Accessories
RWR4525	LM-Milky lens	040: 40W	14-4ft	B: Surface/ Suspended	30:3000K	A: No sensor&EM
	LD-Clear lens	080: 80W	18-8ft		35:3500K	B: With Sensor
	LX-No lens				40:4000K	
					45:4500K	
					50:5000K	
					VK-CCT tunable	


CCT Tunable



- 3000K/3500K-Warm White
- 4000K-Nature White
- 5000K-Cold White

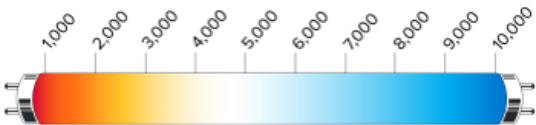

PHOTOMETRIC

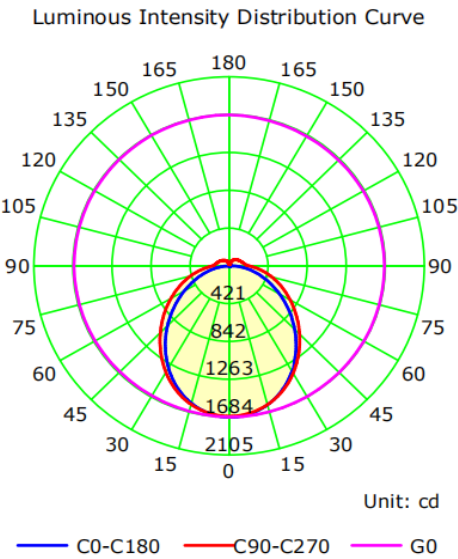


Luminaire	5000K
Input Voltage(VAC)	120-277
Power (W)	42.53
Delivered Lumen(Lm)	4830
Efficacy(Lm/W)	115
Beam Angle	H100.2 V111.1
Power Factor(PF)	>92
Color Rendering Index(CRI)	>82




INSTALLATION

■ Installation Dimension

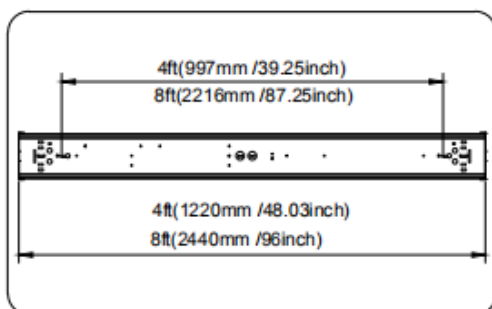

■ Installation

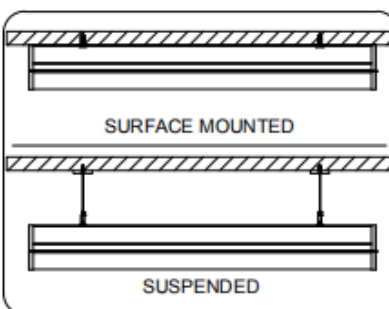

■ Electrical Connection

