


LED STANDARD EXIT SIGNS RXT 0911

Project:	
Type:	
Date:	
Prepared By:	

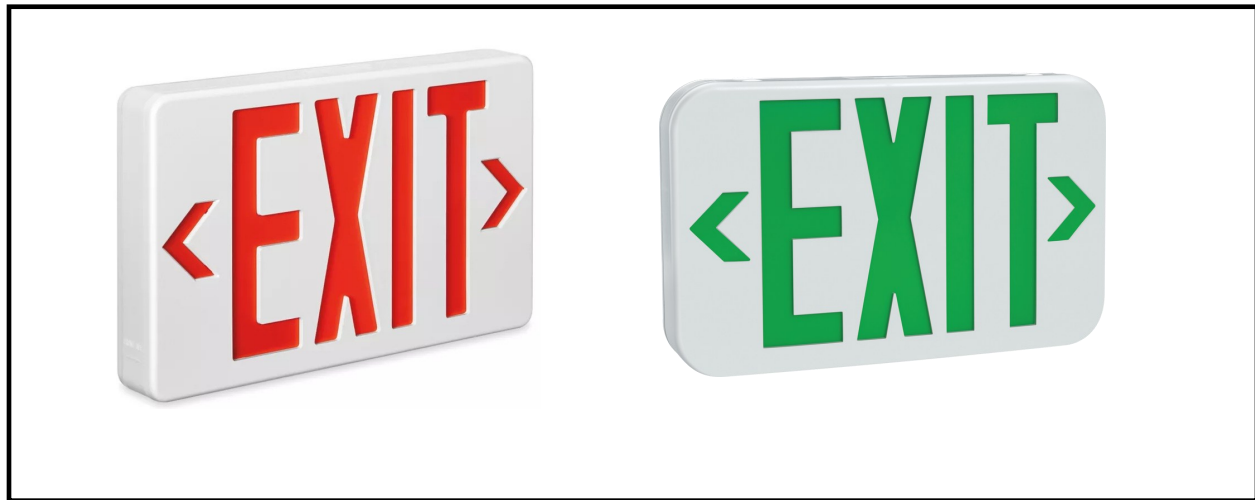

DESCRIPTION

The **LED Standard Exit Signs** connect to the internal battery of the LED lamps, when utility power fails. It lights a path for no less than 90 minutes. Battery recharges automatically when power is restored and is fully charged within 24 hours.

DESIGN FEATURES

Electrical Specs

- 120/277V V - Triac Dimming
- Nickel Cadmium rechargeable battery
- Dual color LED lamp indicator
- Fully automatic operation
- 90 minutes of illumination in case of power failure
- Self testing
- Operating Temperature 50°F to 104°F

Construction

- Flame retardant, Thermoplastic housing
- Single or Double faced
- Universal snap- in and out design

Dimensions

- 11.75" L X 1.75" W X 7.25" H

Installation

- Mounting canopies for wall or top installation
- Removable backplate for easy installation

Certifications

- UL listed
- Damp location
- 5 year limited warranty

ORDER INFORMATION

Model No.	Finish	Self Diagnostic
RXT 0911	White with Red lettering—WR Black with Red lettering—BR White with Green lettering—WG Black with Green lettering—BG	SD

Example: RXT -0911-WR-SD



27305 W. Live Oak Road # 466-A , Castaic, California 91384
E-mail: sales@rayoindustries.com